

Bend

INBU 90°




Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

Dimensions

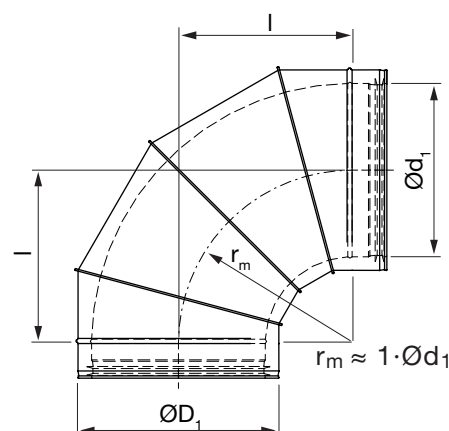

Ød ₁ nom	ØD ₁ mm	l mm	m* kg
80	112	100	0,65
100	132	100	0,72
125	157	125	1,08
160	192	160	1,62
180	200	180	1,96
200	232	200	2,22
224	260	225	3,02
250	280	242	3,60
280	315	280	5,18
300	355	300	5,82
315	355	315	6,80

* = weight can vary ±10%.

Order code

Product	INBU	125	90
Dimension Ød ₁			
Angle α			



Bend

INBU 60°




Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

Dimensions

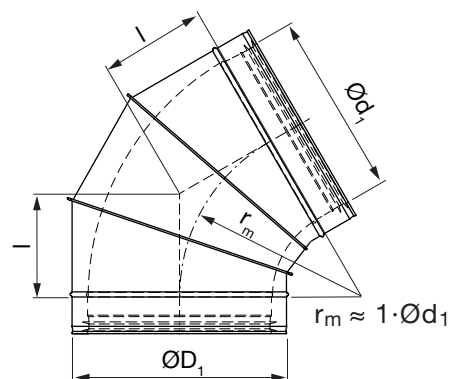

Ød₁ nom	ØD₁ mm	l mm	m* kg
80	112	58	0,50
100	132	58	0,68
125	157	72	0,86
160	192	92	1,24
180	200	104	1,67
200	232	115	1,78
224	260	130	2,22
250	280	144	2,79
280	315	162	3,91
300	355	173	4,31
315	355	182	5,01

* = weight can vary ±10%.

Order code

Product	INBU	125	60
Dimension Ød₁			
Angle α			



Bend

INBU 45°




Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

Dimensions

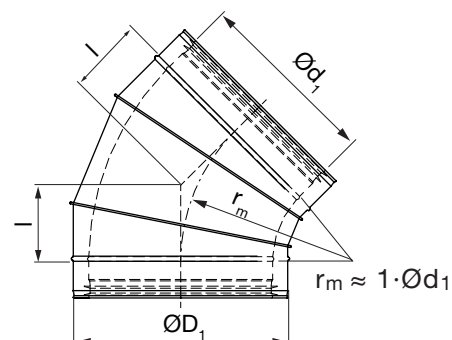

Ød ₁ nom	ØD ₁ mm	l mm	m* kg
80	112	41	0,43
100	132	41	0,50
125	157	52	0,68
160	192	66	1,04
180	200	76	1,22
200	232	83	1,46
224	260	93	1,79
250	280	104	2,26
280	315	116	3,24
300	355	124	3,61
315	355	140	4,14

* = weight can vary ±10%.

Order code

Product	INBU	125	45
Dimension Ød ₁			
Angle α			



Bend

INBU 30°




Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

Dimensions

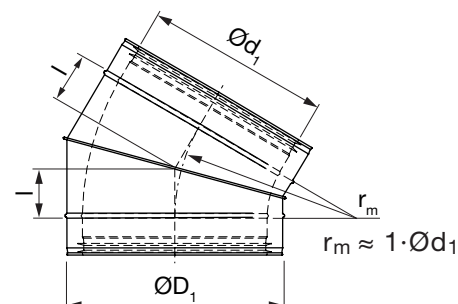

Ød ₁ nom	ØD ₁ mm	l mm	m* kg
80	112	27	0,35
100	132	27	0,41
125	157	33	0,55
160	192	43	0,77
180	200	48	0,89
200	232	54	1,11
224	260	60	1,37
250	280	67	1,86
280	315	75	2,59
300	355	95	2,85
315	355	90	3,27

* = weight can vary ±10%.

Order code

Product	INBU	125	30
Dimension Ød ₁			
Angle α			



Bend

INBU 15°




Description

The bend is double-jacketed and insulated with mineral wool, and is supplied with Lindab Safe rubber seal on the inner dimension.

With stop bead at both inner and outer part to ensure correct installation.

Dimensions

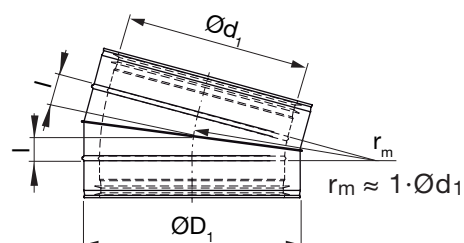

Ød ₁ nom	ØD ₁ mm	l mm	m* kg
80	112	13	0,30
100	132	13	0,33
125	157	16	0,42
160	192	21	0,58
180	200	24	0,73
200	232	26	0,79
224	260	30	1,02
250	280	30	1,46
280	315	37	1,94
300	355	39	2,12
315	355	47	2,39

* = weight can vary ±10%.

Order code

Product	INBU	125	15
Dimension Ød ₁			
Angle α			

