

Muuntoyhde


RCU



Tuotekuvaus

Syvävedetty keskeismuuntoyhde. Virtausteknisesti optimoitu muotoilu takaa matalan painehäviön. Ød sopii kanavan sisään.

Mitat

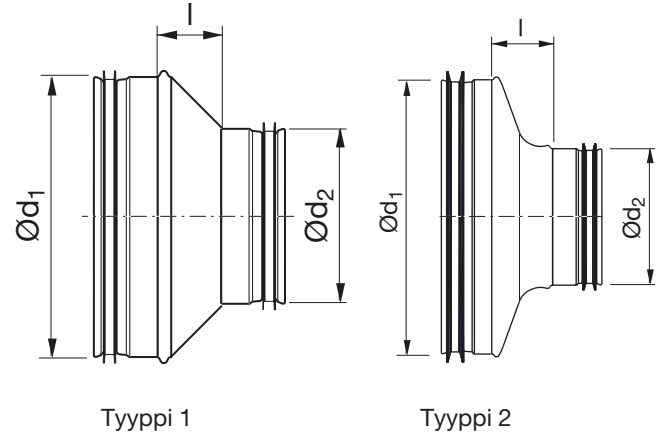

Ød ₁ nom	Ød ₂ nom	l [mm]	Tyyppi	m kg
80	63	18	1	0,12
100	63	30	1	0,15
100	80	26	2	0,12
125	80	36	2	0,16
125	100	27	2	0,16
160	80	55	1	0,31
160	100	46	2	0,23
160	125	35	2	0,22
200	100	46	2	0,30
200	125	55	2	0,30
200	160	39	2	0,30
250	125	70	1	0,61
250	160	60	2	0,48
250	200	42	2	0,46
315	160	91	1	0,86
315	200	74	1	0,75
315	250	50	1	0,74
400	200	118	1	1,25
400	250	94	1	1,27
400	315	54	1	1,11
500 *	250	128	1	2,10
500	315	95	1	2,78
500	400	68	1	1,75
630 *	315	160	1	3,30
630 *	400	118	1	3,20
630 *	500	68	1	2,90
800 *	400	203	1	6,16
800 *	500	153	1	6,42
800 *	630	88	1	6,94

* Pyöristetyllä liitoksella

Tilausesimerkki

	RCU	315	250
Tuotetunnus			
Mitta Ød ₁			
Mitta Ød ₂			





Muuntoyhde



RCU

Tekniset tiedot

1 dimensiojako

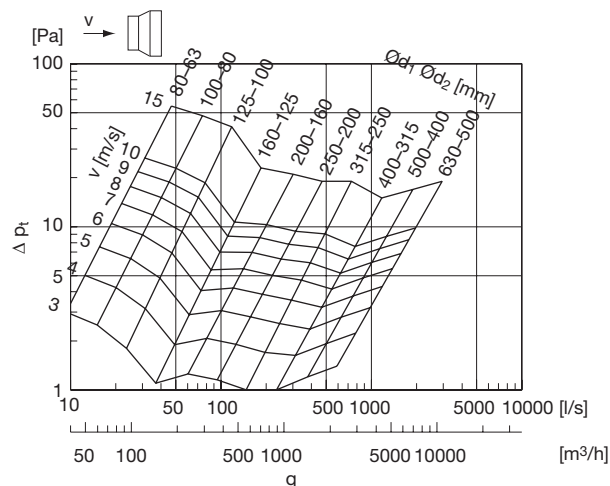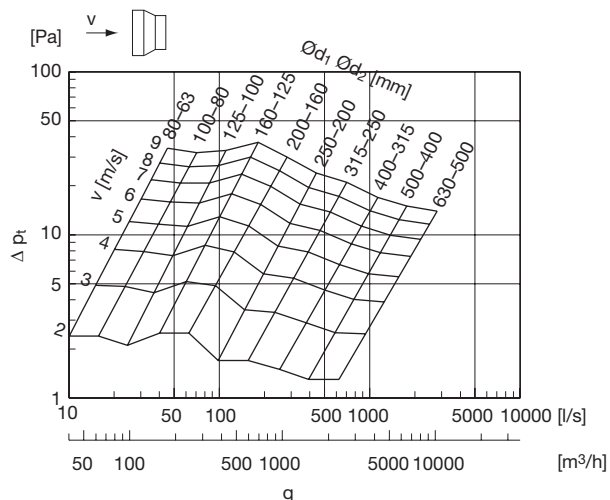

2 dimensiojaot

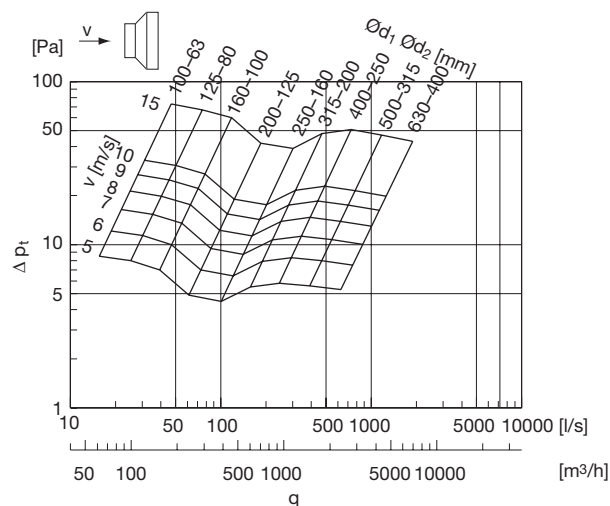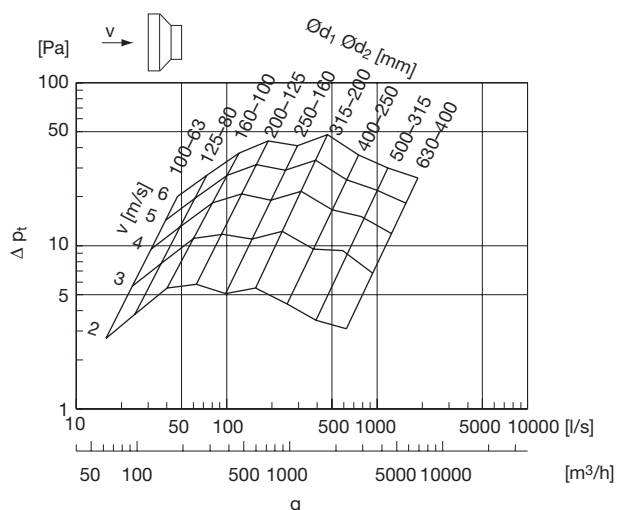

3 dimensiojaot

